



Parts Index

* not to scale

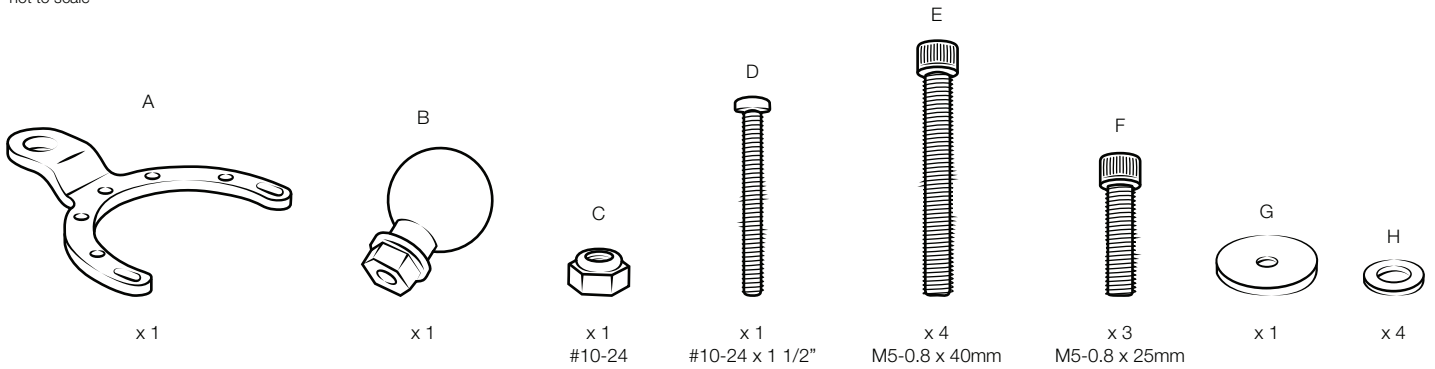

Place the gas tank base on your traditional gas cap to determine the correct alignment with the bolts, and desired position of the RAM® Ball. **Important: Bolt alignment must be symmetrical.**

Use any combination of the provided hardware to replace the factory screws on your gas cap when installing. It is important to note that each of the screws on your gas cap may have different lengths. For every factory screw you replace, the replacement screw should be approximately 12mm longer. Place provided washers under cap screw heads when installing.

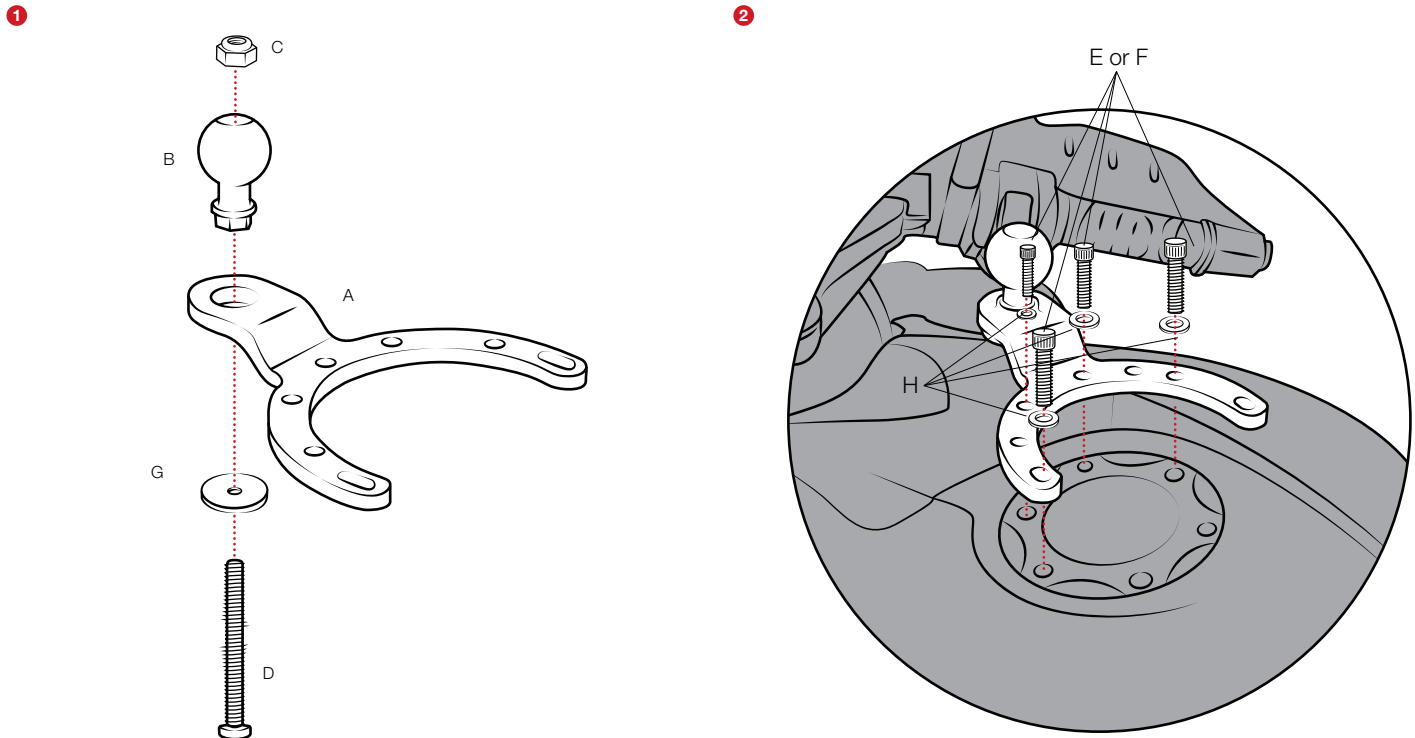

RMR-INS-411



Safety Precaution

Do not install this product near or over an airbag deployment area or in a location that obstructs the driver's vision or interferes with vehicle operation. National Products, Inc does not assume responsibility or liability for any such personal injury, death or property damage.