

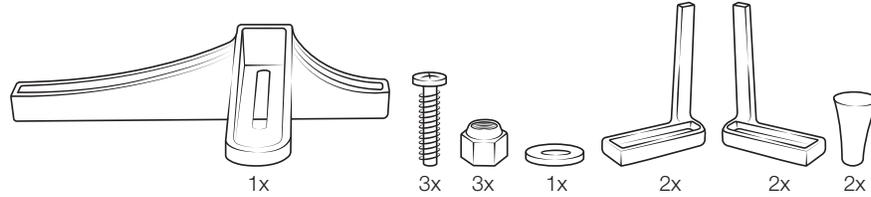
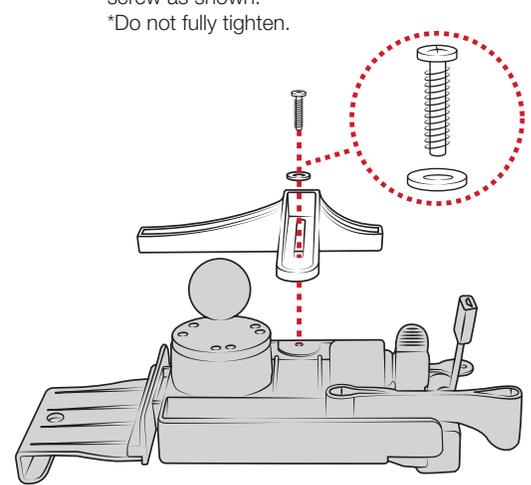



Parts Index

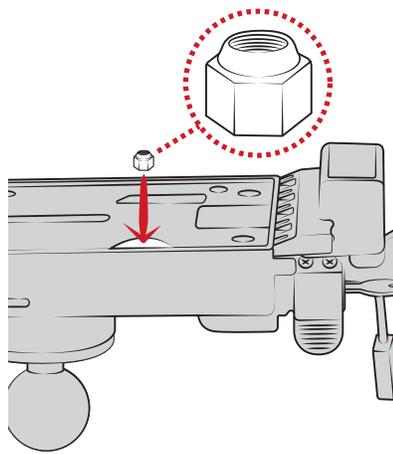


- 1 Remove the front cover of your Tab-Lock.
- 2 Place one nut in nut pocket. White ring must face upward.
- 3 While holding nut in place, attach the side arm behind holder using the washer and screw as shown.
*Do not fully tighten.

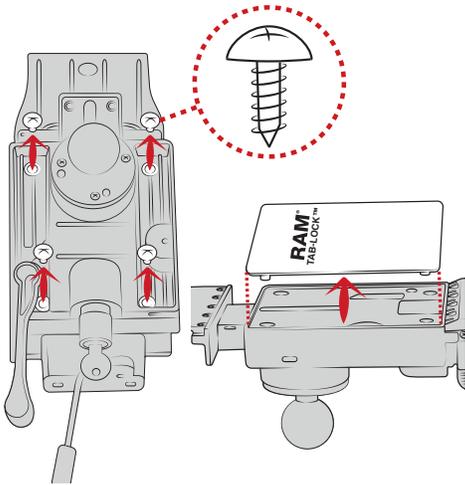


- 4 Place your tablet in the holder, pulling the lever to secure in place.

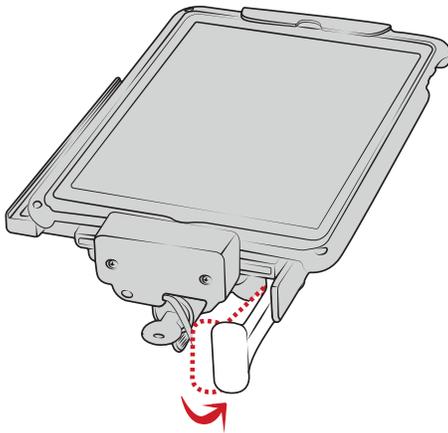



- 5 Attach rubber caps to each of the two side posts.

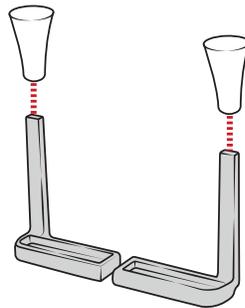


- 6 Pull the side arm outward and attach the side posts to any of the available slotted holes using remaining nuts and screws. Posts must be facing the same direction.
*Do not fully tighten.

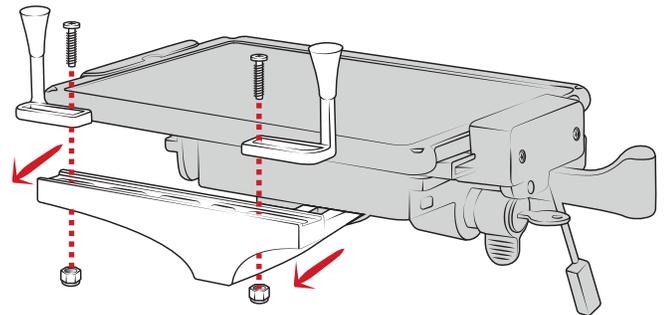

- 7 Bring side arm with posts closer to your tablet. Position side posts in a fashion that does not interfere with any ports or buttons on your device. Make any adjustments as needed such as moving a side post to a different hole, or using an included alternate side post. After adjustments are made, fully tighten all screws.

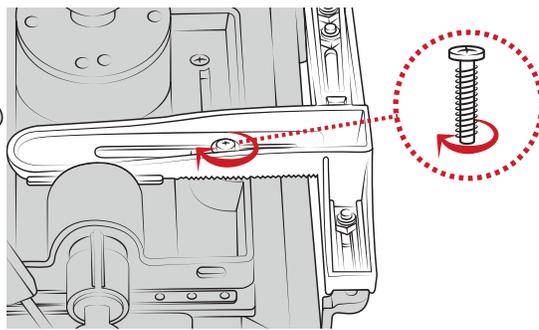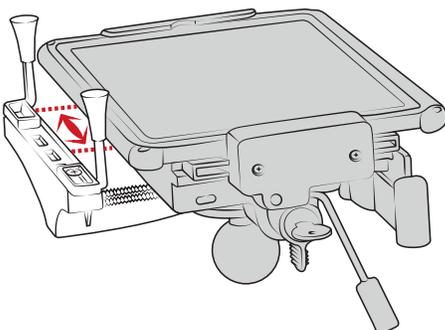

- 8 Remove your tablet. Re-attach the Tab-Lock front cover.

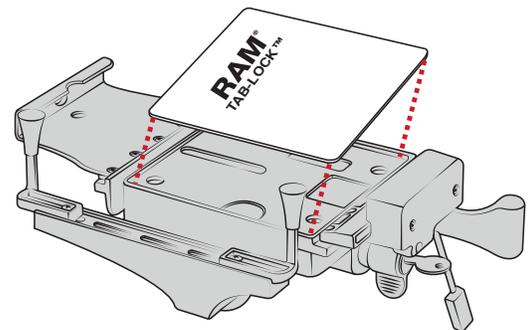

RPR-INS-TABLSA