

Item Number
RAM-VC-LEG-103

RAM Console Leg Kits

RAM Mounting Systems

Console Leg Kit for the
CHEVROLET AVALANCHE (2002-2008) | CHEVROLET 1500/2500/3500 C/K (1999-2008)
CHEVROLET SILVERADO (1999-2008) | CHEVROLET SUBURBAN (2000-2006)
CHEVROLET TAHOE (2000-2010) | GMC SIERRA (2000-2008)
GMC YUKON/YUKON XL (2000-2008)

SPECIFICATIONS

Drilling Requirements:
No drilling required

Finish:
Black Powder Coating

Placement:
Over transmission hump



INSTALLATION INSTRUCTIONS

The purpose of this instruction sheet is to illustrate the manufacturer's recommended method of installation for the RAM-VC-LEG-103 Leg Kit that includes anchor legs and a bagged hardware kit.

Step 1: Assemble top plate and legs

1. Bolt the front legs and the front stabilizer bracket to the top plate as close as possible to the location they will ultimately be in. Use the 3/8-16 hardware provided to secure the legs to the top plate.
2. Bolt the rear support to the top plate using the 1/4-20 hardware provided. This should be attached at the rear-most location on the top plate.
3. Next, attach the elevator bolt to the bottom of the rear support. If you find that for your application the supplied elevator bolt is not the correct length, consider substituting a 1/4-20 carriage bolt. These can be obtained at most any hardware store in a variety of lengths.


Step 2: Installation of top plate and legs into vehicle

1. Loosen the mounting hardware for the front bucket seats. Lift the seats off the seat studs so that the factory center console or smaller center seat can be removed.
2. Place the previously assembled top plate and legs into position over the transmission hump. Place the slots in the front RAM legs over the top of the vehicle studs and lower into place.
3. Next, lift the vehicle seats back over the vehicle studs and legs and lower into place. Using the factory hardware, tighten the seats back down.

Disclaimer regarding mounting of product:

National Products Inc. and/or RAM Mounting Systems is not liable under any theory of contract or tort law for any loss, damage, personal injury, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicles or any other application. In order to safely install and use RAM Mounting System or National Products Inc. products full consideration of vehicle occupants, vehicle systems (i.e. the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. RAM Mounting Systems and National Products Inc. specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufacturers specifications and recommendations.

RAM Mounting Systems
8410 Dallas Ave S
Seattle, WA 98108
Phone: (206) 763-8361
Fax: (206) 763-9615
www.rammount.com
support@rammount.com

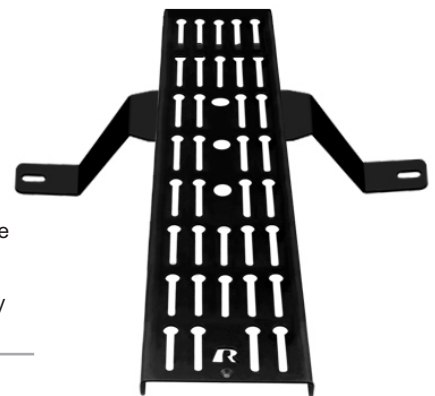

RAM-VC-LEG-103 (Leg Kit)
shown attached to
RAM-VC-TP-29 (Top Plate)



RMR-INS-VC-LEG-103

**Important product notes for:
Console applications**

RAM Console Leg Kits
RAM Mounting Systems

Area must be open or be made open to fit leg kits

SPECIFICATIONS

Drilling Requirements:

For some vehicles, drilling may be required. See vehicle specific kits for No-Drill™ applications and universal for all others.

Finish:

Black Powder Coating



INSTALLATION REQUIREMENTS

The area between the front seats must be accessible in order to mount the leg kits and top plates to support a console.

The area must be open between bucket seats or, if the vehicle has a 40/20/40 front bench seat or similar configuration, the center section must be removed.

If the vehicle has a floor mounted shifter, either automatic, manual, or 4x4 lever, make sure there is ample room to the rear of the shifter and the floor board is clear before making a RAM-VC-LEG kit selection. The installed RAM-VC-LEG kit should be installed in a manner that does not interfere with the operation of shifters or levers.

For some vehicles, there may be room between the center of the bench seat front and the dash of the vehicle. If removing the center section of the bench seat is not an option, but there is room at this location, consider the universal leg kit, short top plate, and short console box as a possible solution.

If the vehicle is equipped with a factory installed center console, make sure it can be removed without :

1. Permanently disabling the vehicle.
2. Exposing sensitive electrical equipment to harm.
3. Exposing mechanical systems to harm.
4. Interfering with factory installed safety equipment.

Some factory installed equipment and consoles cannot be removed. If this is the case for your vehicle, consider other RAM products designed for mounting electronics safely and securely in your vehicle.

RAM Mounting Systems
8410 Dallas Ave S
Seattle, WA 98108
Phone: (206) 763-8361
Fax: (206) 763-9615
www.rammount.com
support@rammount.com



RMR-INS-VC-LEG-103